


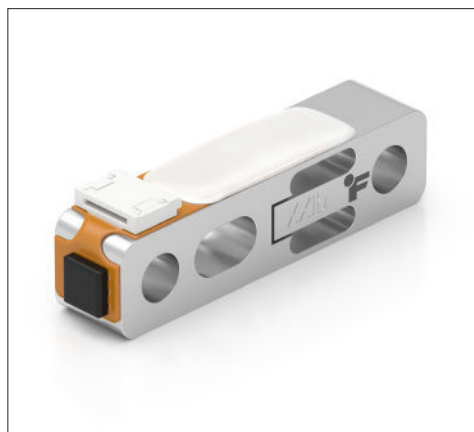

FEATURES

- Lightweight at 5.6 grams and compact form factor of 0.3" [8.0 mm] height and 0.22" [5.6 mm] width.
- Side-mount design fits space-constrained applications.
- Shear force measurement enabled by side-mount configuration.
- Can integrate with VDC, mA, SPI, RS-422, USB, BLE, RS-232, UART output and more.
- Integrated Ø3mm pin-compatible loading and mounting provisions for repeatable fixturing and alignment.
- Safe overload stops in tension and compression up to 150% of Rated Output.
- Integrated IEEE 1451.4 TEDS auto-recognition minimizes setup errors.
- Designed for OEM high volume applications.
- Heat-treated, aerospace-grade stainless steel enhances durability, linearity, and off-center loading performance.

SPECIFICATIONS

PERFORMANCE

Nonlinearity $\pm 0.2\%$ of R.O. (5 and 10 lb)
 $\pm 0.3\%$ (25 and 50 lb)

Hysteresis $\pm 0.2\%$ of R.O. (5 and 10 lb)
 $\pm 0.3\%$ (25 and 50 lb)

Nonrepeatability $\pm 0.1\%$ of R.O.

ELECTRICAL

Rated Output (R.O.) See Capacities table

Excitation (VDC or VAC) 10 max

Bridge Resistance 350 Ohm nom

Connection 6 Position FFC FPC, Contact Top, 0.020" (0.50mm) Pitch, Molex #0512810698

MECHANICAL

Weight (approximate) 0.01 lb [5.6 g]

Safe Overload 150% of R.O.

Material 17-4 PH S.S.

IP Rating IP40

TEMPERATURE

Operating Temperature -4 to 185°F [-20 to 85°C]

Compensated Temperature 60 to 160°F [16 to 71°C]

Temperature Shift Zero $\pm 0.01\%$ of R.O./ $^{\circ}\text{F}$ [$\pm 0.018\%$ of R.O./ $^{\circ}\text{C}$]

Temperature Shift Span $\pm 0.005\%$ of Load/ $^{\circ}\text{F}$ [$\pm 0.009\%$ of Load/ $^{\circ}\text{C}$]

CALIBRATION

Load Calibration Test Excitation 5 VDC

Load Calibration (standard) Certificate of Conformance

Load Calibration (available) 5-pt Tension and Compression

CONFORMITY


RoHS EU 2015/863

CE EN55011; EN61326-1


Model LSM100

FEATURES

 Non-loading surface, do not contact

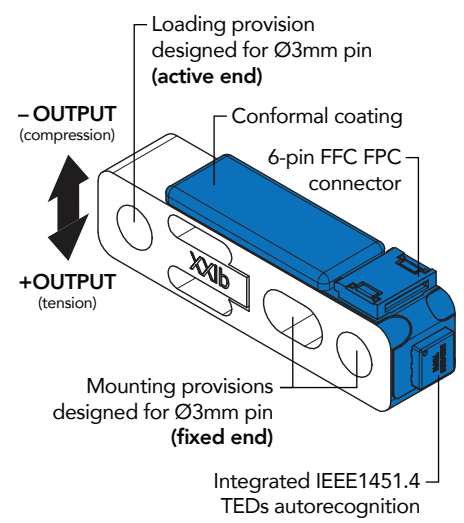

MOUNTING

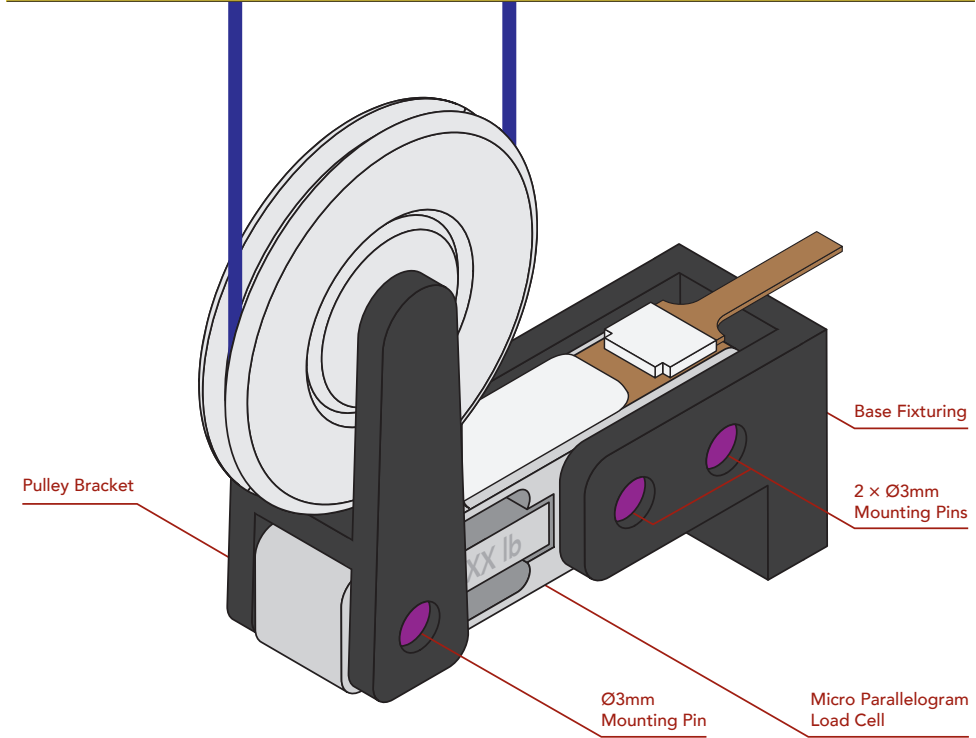

6 POSTION FFC FPC CONNECTOR	
PIN #	WIRING CODE
1	- EXCITATION
2	+ SIGNAL
3	- SIGNAL
4	+ EXCITATION
5	TEDS GND
6	TEDS DATA

CAPACITIES				
ITEM #	CAPACITY (lb/N)	OUTPUT (mV/V) Nom.	Deflection (in./mm)	Natural Frequency (kHz)
FSH04834	5/22.2	1	0.0005/0.0127	11
FSH04835	10/44.5	2	0.0010/0.0254	11
FSH04836	25/111.2	1.75	0.0010/0.0254	20
FSH04837	50/222.4	1.75	0.0015/0.0381	25

Model LSM100


DIMENSIONS inches [mm]

TOLERANCE:

.X $\pm .1$ " [2.5]

.XX $\pm .01$ " [0.25]

.XXX $\pm .005$ " [0.127]

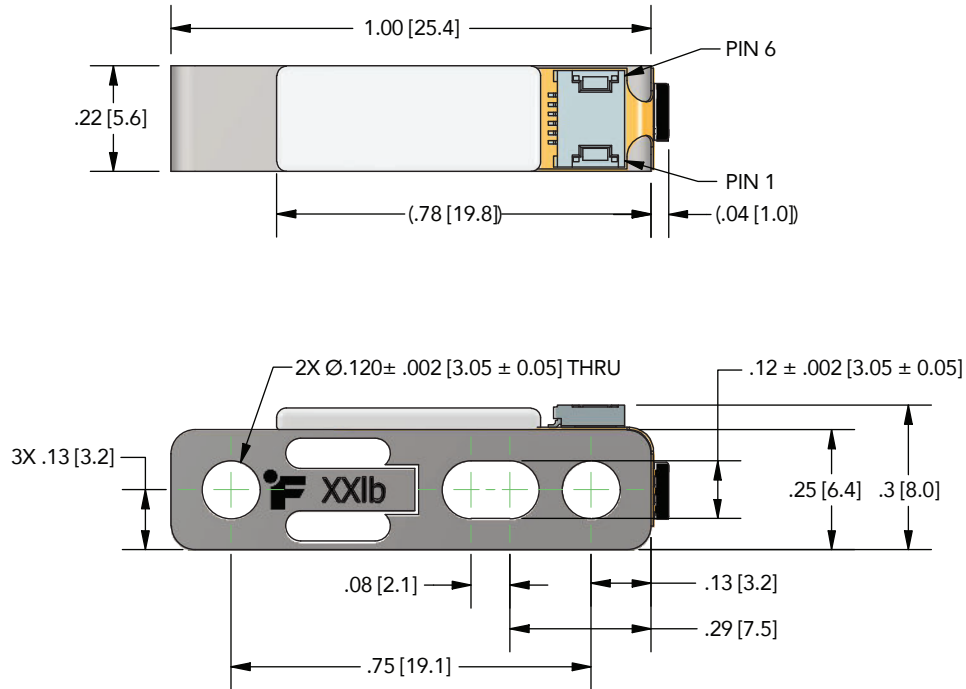

Drawing Number: FI1591

FUTEK reserves the right to modify its design and specifications without notice. Please visit <https://www.futek.com/terms-of-sale> for complete terms and conditions.

The information provided herein was developed using FEA analysis, empirical data and multiple testing simulations. FUTEK presents the information in good faith and believes it is correct but makes no representations or warranties as to the completeness or accuracy of the information provided. User's application may produce different data and/or results. By using this information, you agree that you have read and understand this disclosure. Please contact us to discuss your particular application and needs.

19 Morgan, Irvine, CA 92618 USA

futek@futek.com

www.futek.com



RoHS



U.S. Manufacturer